

Glasswashers | Dishwashers | Pass Throughs

# Price Guide

Pricing and Specifications  
Valid from 01 September 2024



# The power of simple

Designed to meet the needs of a wide range of hospitality and catering operations, our entire range is defined by its simplicity.

Whether it's an Undercounter or Pass Through model, your Classeq machine will be simple to choose and install, simple to use, simple to clean and simple to maintain.



Our entire range is designed and made in Britain. Each machine is rigorously tested and robust in every way, built to withstand the pressures of a busy kitchen or bar.

Supporting you from day one and throughout the life of your machine.

# The New Undercounter range


One model. Two sizes. Set up on install as a glass or dishwasher.





### Simple choice.

One model level with all the features you need. Just choose the size, power and optional integrated water softener.

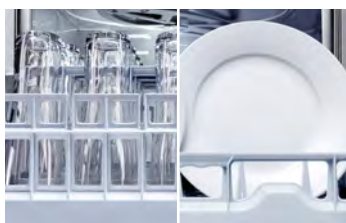

### Simple set up.

Commissioned on install as a glass or dishwasher in minutes.



### Simple use.

Press on. Press wash. Watch the display for notifications and troubleshooting.



### Simple cleaning.

Simple click in, click out wash arms, double filtration system, and moulded basket rails all aid simple cleaning.



### Simple app.

New bluetooth app for operators and service technicians. Access user guides, machine settings, monitor performance data and service information.



### Simple servicing.

The repositioning of key parts make servicing and maintenance quicker. Reducing maintenance costs throughout the life of the machine.

## Standard features across the undercounter range:

-  Colour coded display
-  Reduced rinse water consumption
-  Energy saving standby mode
-  Drain pump, rinse booster pump, detergent and rinse aid pumps
-  Double skinned door and cabinet to reduce noise and limit heat loss
-  Hygiene and service reminders

-  Deep clean mode and refresh cycle
-  Optional audible alarm
-  2 year warranty on parts and labour on all Classeq models
-  Bluetooth connectivity
-  Three power options: 15A, 30A Single Phase and 15A Three Phase



# THE NEW C400


The perfect option for when space is limited.  
Commissioned as a glass or dishwasher on site.



Model	Code	Amps	Price
C400	851V0004	15A - 1ph Available in 3phase	<b>\$4,492</b>



## New Dimensions

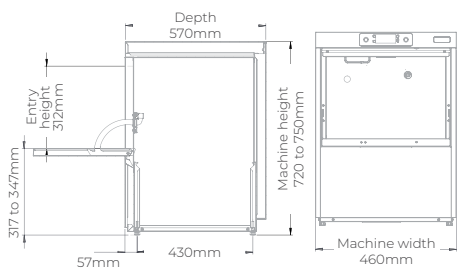

Note: external dimensions of the C400 model differs from older models.

## Glasswasher

- Pint size glasses per rack: 16
- Theoretical max racks per hr: 40
- Glasses per hour: 640
- Two wash programmes:  
Light – 1.5 minutes  
Standard – 2 minutes

## Dishwasher

- 10-inch plates per rack: 9
- Theoretical max racks per hr: 30
- Plates per hour: 270
- Three wash programmes:  
Light – 2 minutes  
Standard – 3 minutes  
Intensive – 5 minutes

The C400 can be specified with an integral water softener, an essential addition when installed in medium or hard water areas.

Each C400 machine includes two 400 x 400 baskets: one for plates with a small cutlery holder and one for glasses with two inserts.

It is supplied with a rack adapter to suit Australian bar racks (14 x 17").




New bluetooth app for operators and service technicians.  
Access user guides, machine settings, monitor performance data and service information.

# THE NEW C500


Our most popular Undercounter model. Perfect option for every busy kitchen or bar. Commissioned as a glass or dishwasher on site.



Model	Code	Amps	Price
C500	853V0001	15A - 1ph	<b>\$6,850</b>



## New Dimensions

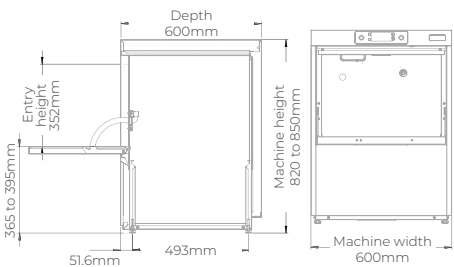

Note: external dimensions of the C500 model differs from older models.

## Glasswasher

- Pint size glasses per rack: 25
- Theoretical max racks per hr: 40
- Glasses per hour: 1,000
- Two wash programmes:  
Light – 1.5 minutes  
Standard – 2 minutes.

## Dishwasher

- 10-inch plates per rack: 18
- Theoretical max racks per hr: 30
- Plates per hour: 540
- Three wash programmes:  
Light – 2 minutes  
Standard – 3 minutes  
Intensive – 5 minutes

The C500 can be specified with an integral water softener, an essential addition when installed in medium or hard water areas.

Each C500 machine includes two 500 x 500 baskets: one for plates with a small cutlery holder and one for glasses with three inserts.



New bluetooth app for operators and service technicians.  
Access user guides, machine settings, monitor performance data and service information.

# P500


High volume, simple to use, water mark certification dishwashers, suitable for straight-through or corner installation.



Model	Code	Amps	Price
P500	901V0008	20amp 3phase Available in 15amp single phase additional cost \$250+gst	<b>\$9,107</b>



## Dimensions

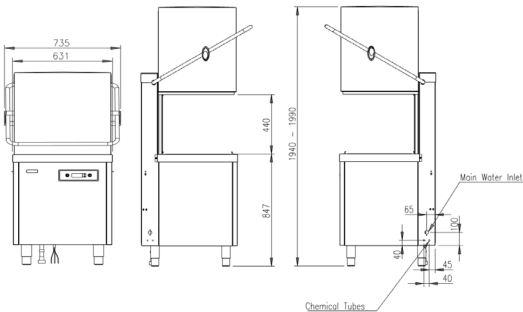

## Glasswasher or Dishwasher

- Pint size glasses per rack: 25
- Theoretical max racks per hr: 40
- Glasses per hour: 1,000
- Two wash programmes:  
Light - 1.5 minutes  
Standard - 2 minutes

Classeq's range of digital Pass-through dishwashers (also known as hood types) are perfectly suited to any busy kitchen and are capable of cleaning up to 720 plates per hour. With a 39 litre wash tank, running costs are kept to a minimum and features such as continuous hood clean and removable wash arms ensure that they are easy to clean.

All machines have simple to use digital controls, an LCD display to show wash and rinse tank temperatures and select cycle programs. Drain pumps and Chemical pumps as standard.

Each P500 machine includes three 500 x 500 baskets: one for plates, one for cups, bowls, and large utensils, and one cutlery rack.

# P500DUO


The pass through dishwasher you can rely on.  
All the features of the P500 with the additional a rinse booster pump and higher boiler rating for quick recovery time.



Model	Code	Amps	Price
P500	902V0064	20amp 3phase	<b>\$10,455</b>



## Dimensions

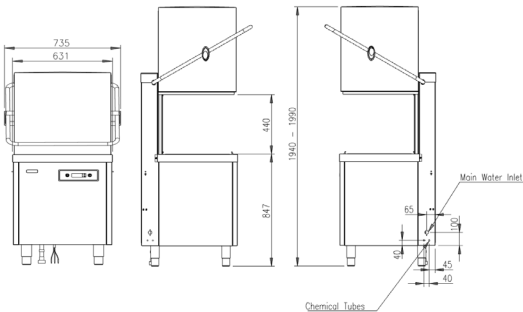

## Glasswasher or Dishwasher

- Pint size glasses per rack: 25
- Theoretical max racks per hr: 40
- Glasses per hour: 1,000
- Two wash programmes:  
Light - 1.5 minutes  
Standard - 2 minutes

As standard, all variants in the P500 series feature an easy-to-operate LCD display with intuitive colour scheme. The settings for detergent and rinse aid consumption, as well as the ventilation of the dosing devices can be individually adjusted by the user to correspond perfectly to the particular dishwashing requirements in every kitchen.

This means you get an easy-to-use machine with a high washing capacity and optimum washing results. This machine is also optionally available with a built-in water softener. All the features of the P500 with the additional a rinse booster pump and higher boiler rating for quick recovery time.

Each P500DUO machine includes three 500 x 500 baskets: one for plates, one for cups and bowls, and one cutlery rack.



# Accessories




## Baskets & Racks

Name	Size	Suitable for	Code	Price
G400 Glasswash Basket	350 x 350mm	G400	30001164	<b>\$150</b>
C400 Glasswash Basket	400 x 400mm	C400, G400, G400DUO	30001165	<b>\$150</b>
C500 Tall Glass Plastic Basket	500 x 500mm	C500, G500, G500DUO	30013206	<b>\$160</b>
400mm Glass Basket Insert	-	C400	30018552	<b>\$65</b>
500mm Glass Basket Insert	-	C500	30018551	<b>\$65</b>
Dish Insert	-	C400	30007213	<b>\$30</b>
Glass/Cup Basket	500 x 500mm	C500	30001197	<b>\$150</b>
Plate Basket	400 x 400mm	C400, D400, D400DUO	30001166	<b>\$150</b>
Plate Basket	500 x 500mm	C500, D500, D500DUO, All P500 models	30001198	<b>\$150</b>
Small Cutlery Holder - Single	-	All models	30001167	<b>\$65</b>
Cutlery Holder - Eight Compartments	-	C400, D500, D500DUO	3602258	<b>\$150</b>




# New Undercounter Range

## C400



## C500



Note: external dimensions of the new models differs from older models.



**C400 Model**



**C500 Model**

### Dimensions

Width	460mm	600mm
Height	720-750mm	820-850mm
Depth	570mm	600mm
Door Height (when open)	310mm	364mm
Door Depth (when open)	910mm	990mm
Clear Entry Height	312mm	352mm

### Hydraulics specification

Water supply connection	G3/4" (3/4"BSP)	G3/4" (3/4"BSP)
Required water pressure min/max	1-10 bar	1-10 bar
Incoming Water temperature min/max	4°C/55°C	4°C/55°C
Drain size	40mm diam.	40mm diam.
Maximum drain height (from machine base)	500mm	600mm
Optional integrated water softener	Yes	Yes

### Electrical specification

#### 15 Amp Plug – 1 Phase

Amps required	15A (1 Phase)	15A (1 Phase)
Standard operating voltage	220-240V/1N~/50Hz	220-240V/1N~/50Hz
Total connected load	2.5 kW	2.5 kW

#### 30 Amp – 1 Phase

Amps required	30A (1 Phase)	30A (1 Phase)
Standard Operating Voltage	220-240V/1N~/50Hz	220-240V/1N~/50Hz
Total Connected Load	6.5 kW	6.5 kW

#### 15 Amp – 3 Phase

Amps required	15A (3 Phase)	15A (3 Phase)
Standard Operating Voltage	380-415V/3N~/50Hz	380-415V/3N~/50Hz
Total Connected Load	6.5 kW	6.5 kW

### Capacities & Performance

Glasses per rack	16	25
Plates per rack	9	18
Wash Programmes - Glass	1.5 & 2 min. cycles	1.5 & 2 min. cycles
Wash Programmes - Dish	2, 3 & 5 min. cycles	2, 3 & 5 min. cycles
Theoretical max. racks per hour - Glass	40	40
Theoretical max. racks per hour - Dish	30	30
Wash tank capacity	9.5 litres	15 litres
Rinse tank capacity	6.5 litres	6.5 litres
Wash temperature	60 °C	60 °C
Rinse temperature - Glass	70 °C	70 °C
Rinse temperature - Dish	82 °C	82 °C
Water consumption per cycle	2.75 litres	2.75 litres

### Other

Weight (Empty)	49.5Kg / 54.5 Kg (WS)	55.8Kg / 60.8 Kg (WS)
Weight (Full)	66Kg / 72.5 Kg (WS)	77.3Kg / 83.8 Kg (WS)
Weight (Packed)	58.3Kg / 63.3 Kg (WS)	63.8Kg / 68.8 Kg (WS)
Optional Inbuilt Water Softener	Yes	Yes

## Pass Through Range



	P500	P500DUO
<b>Dimensions</b>		
Width	635mm	635mm
Depth	712mm	712mm
Height - Hood Open	1955-2010mm	1955-2010mm
Height - Hood Closed	1460-1515mm	1460-1515mm
Maximum clear entry height	440mm	440mm
Water inlet height floor level	255-310mm	255-310mm
Drain height floor level	0-700mm	0-700mm
Drain size	Ø40mm	Ø40mm
Rack size	500mm <sup>2</sup>	500mm <sup>2</sup>
<b>Hydraulic specifications</b>		
Water supply connection	3/4"	3/4"
Required water pressure	2-4 bar	2-4 bar
Required water flow rate	11Ltrs/min 4Ltrs/min (WS)	11Ltrs/min 4Ltrs/min (WS)
<b>Electrical specifications</b>		
Operating voltage Standard	380-415AC/50/3N	380-415AC/50/3N
Operating voltage Optional	220-240AC/50/1N	–
Amps required - 1 Phase Water fed @	40°C - 20A 10°C - 20A	–
Amps required - 3 Phase Water fed @	40°C - 20A 10°C - 20A	40°C - 20A 10°C - 20A
Rinse boiler heating 380-415AC/50/3N 220-240AC/50/1N	6.00kW 6.00kW	8.64kW –
Total Connected Load 380-415AC/50/3N 220-240AC/50/1N	6.68kW 6.68kW	9.32kW –
<b>Performance</b>		
Theoretical maximum racks/hour	40	40
Max no. of plates per rack	18	18
Cycle Times (mins)	1.5 / 3 / 5	1.5 / 3 / 5
Operating noise level	<70dB	<70dB
Net weight	130kg	130kg
Wash pump size	0.58kW	0.58kW
Wash pump capacity	380Ltrs/min	380Ltrs/min
Wash tank capacity	28Ltrs	28Ltrs
Wash tank heating	4.05kW	4.05kW
Wash tank temperature	55°C	55°C
Rinse boiler capacity	7.5Ltrs	7.5Ltrs
Rinse boiler temperature	82°C	82°C
Rinse water consumption at 2 bar	3 Ltrs	3 Ltrs
<b>Components</b>		
Built in air gap (WRC approved)	•	•
Rinse booster pump	N/A	•
Built-in detergent dispenser	•	•
Built-in rinse aid dispenser	•	•
Drain pump	•	•
Temperature interlock	•	•
Built-in water softener	Optional	Optional



## Classeq

Winterhalter Pty Limited  
Commercial Dishwashers & Systems  
*Classeq is a product of Winterhalter GMBH*  
[classeq.com.au](http://classeq.com.au)

### Winterhalter Australia

+61 2 9645 3221  
[info@classeq.com.au](mailto:info@classeq.com.au)

### New Zealand

+64 9 973 5100  
[Sales@winterhalter.co.nz](mailto:Sales@winterhalter.co.nz)

Simple. Robust.  
**CLASSEQ**

Classeq Price Guide